




Engineered for Dredging

Leaflet Quick Gold Dredge

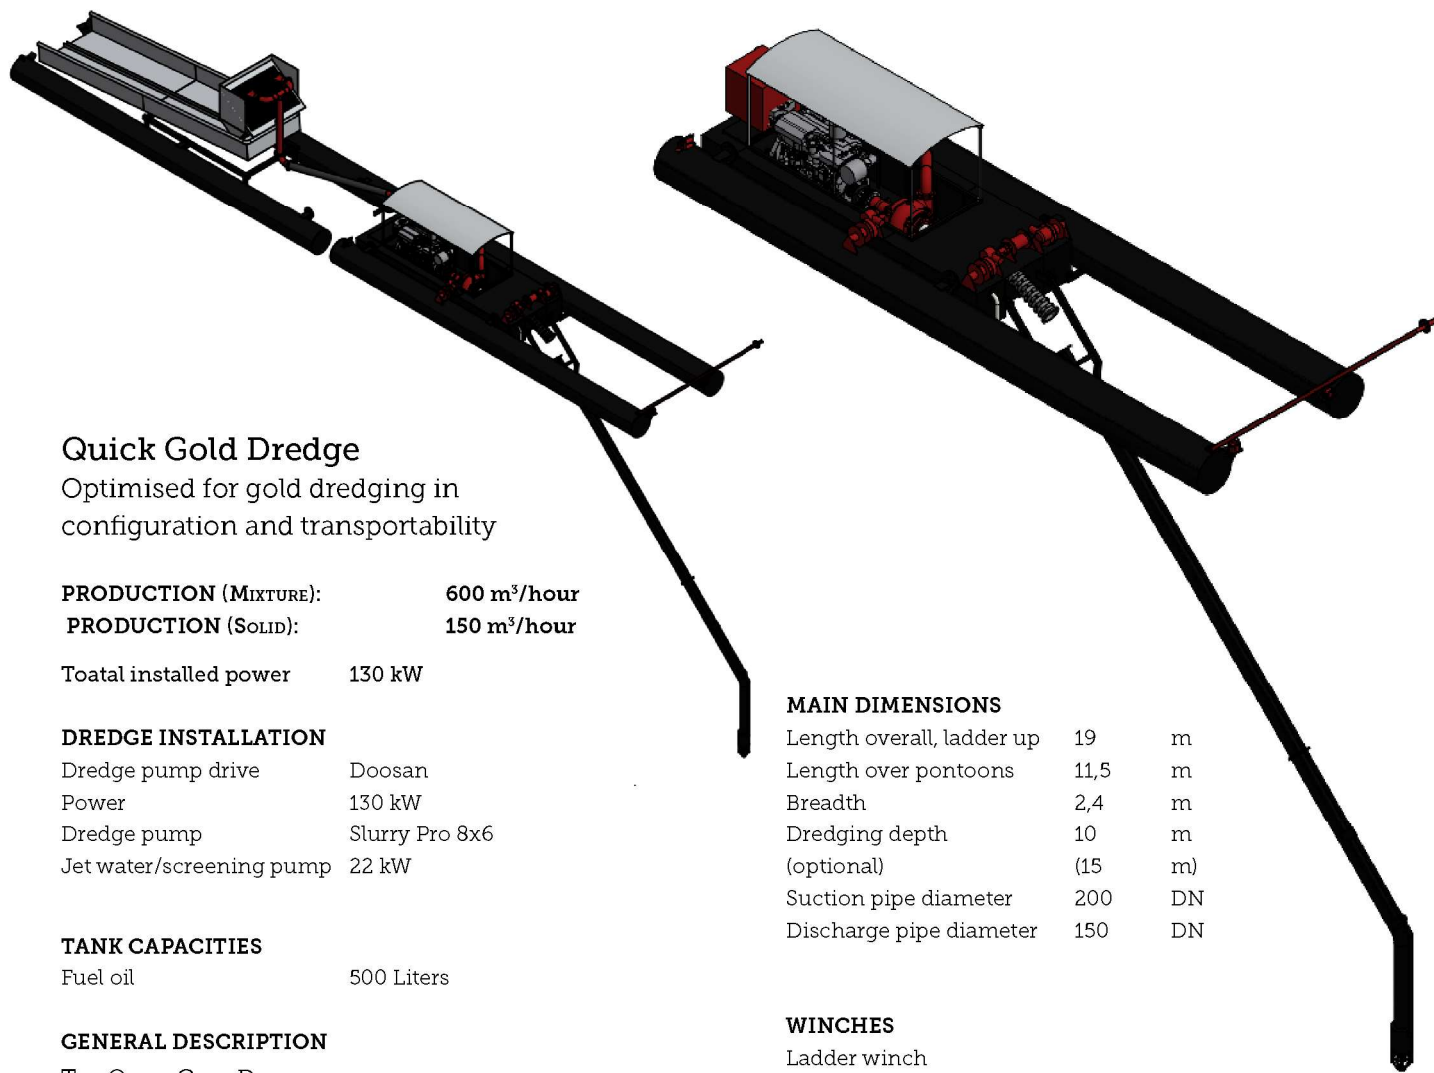

Quick Gold Dredge

Optimised for gold dredging in configuration and transportability

PRODUCTION (MIXTURE): 600 m³/hour

PRODUCTION (SOLID): 150 m³/hour

Total installed power 130 kW

DREDGE INSTALLATION

Dredge pump drive Doosan
Power 130 kW
Dredge pump Slurry Pro 8x6
Jet water/screening pump 22 kW

TANK CAPACITIES

Fuel oil 500 Liters

GENERAL DESCRIPTION

THE QUICK GOLD DREDGE IS AN EASY TRANSPORTABLE PLAIN SUCTION DREDGE WHICH CAN WORK IN CONFINED AND REMOTE IT IS FITTED WITH A SCREENING PLANT AT THE BACK OF THE DREDGER SO THE VESSEL IS A "STAND ALONE" COMPLETE SOLUTION FOR YOUR GOLD MINING OPERATION. THE DREDGE'S JETWATER SYSTEM THE DREDGE CAN BE OPERATED BY A SINGLE PERSON AND IS ALSO DESIGNED TO BE "EASY" IN MAINTENANCE AND REPAIR.

MAIN DIMENSIONS

Length overall, ladder up	19	m
Length over pontoons	11,5	m
Breadth	2,4	m
Dredging depth	10	m
(optional)	(15)	m
Suction pipe diameter	200	DN
Discharge pipe diameter	150	DN

WINCHES


Ladder winch		
Line pull first layer	12	kN
Mooring winches (3x)		
Wire pull first layer	9	kN
Hauling speed	0..20	m/min

STANDARD FEATURES

- Floating screening plant
- High efficiency dredge pump
- Transportable by road
- Transportable in 40ft standard container
- Heavy duty design
- Low maintenance
- Modular design
- High quality components
- "unsinkable" pontoon design

OPTIONAL EQUIPMENT



- Auger head
- Cutter head
- Installation and commissioning
- Floating pipeline
- Training
- Propulsion
- operation cabin
- Fully electric

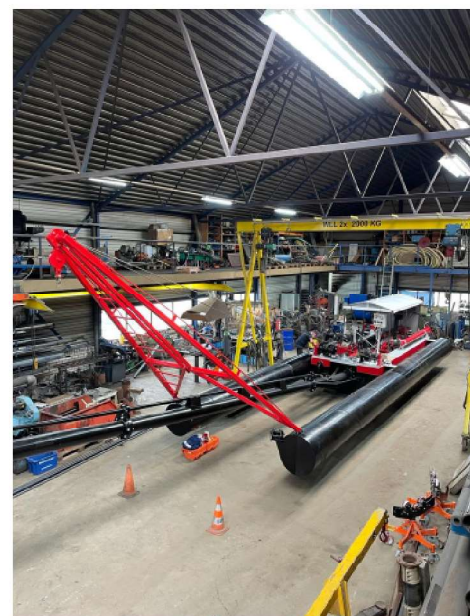

ECT MARINE | Engineered for Dredging



ECT MARINE
QUICK GOLD DREDGE

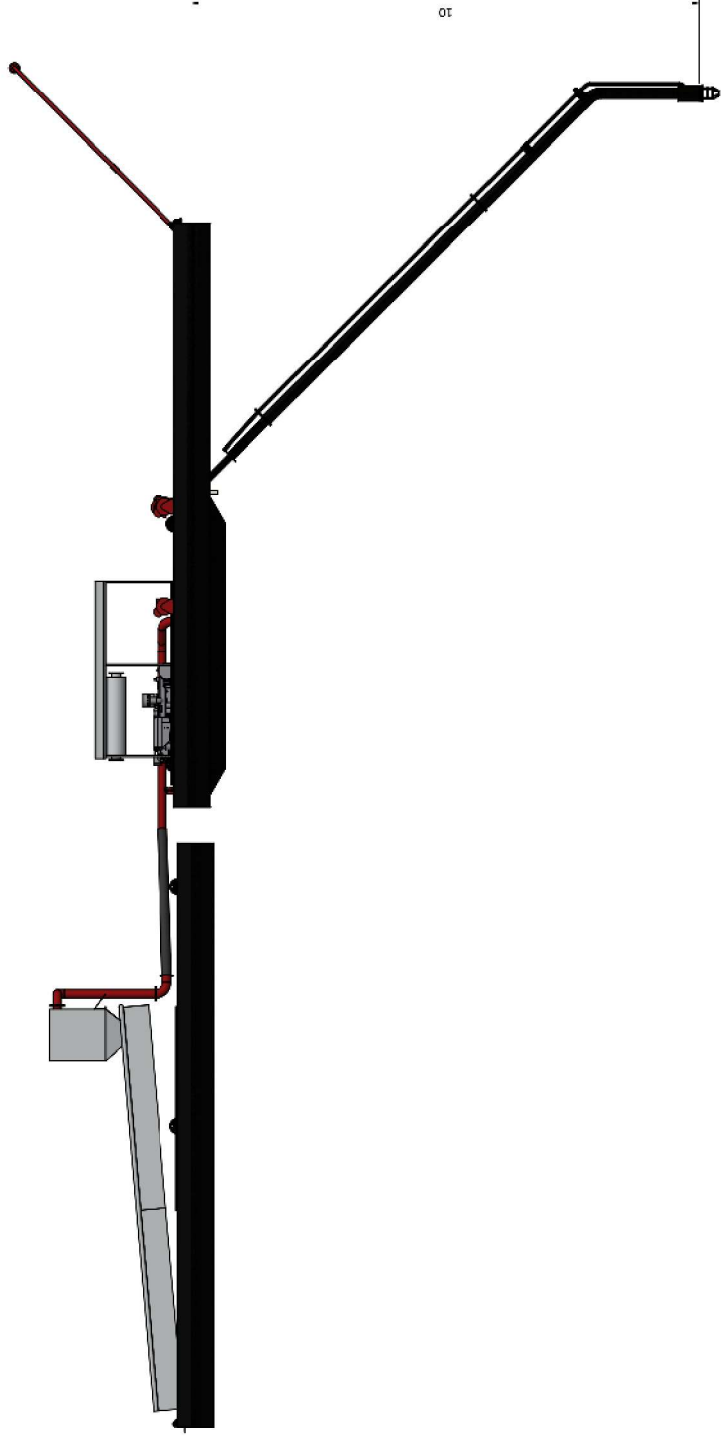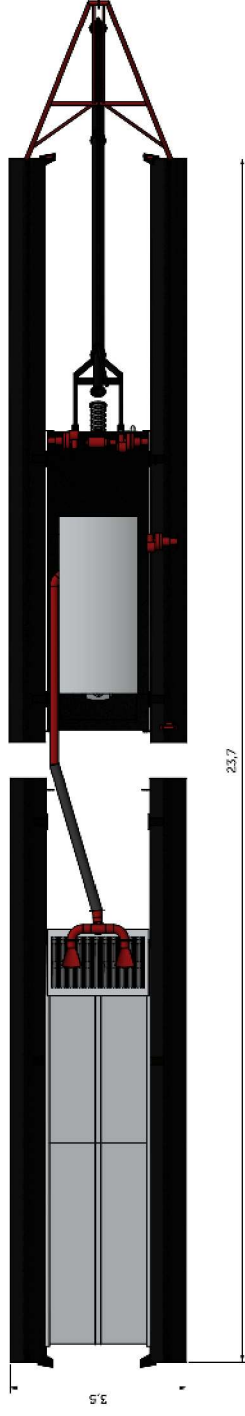



Engineered for Dredging

Information Leaflet Quick Gold Dredge Pictures

